



PLANTING NOTES:


1. COMPLETE ALL LANDSCAPE PLANTING AND RELATED EARTHWORK INCLUDING ALL PRODUCTS, EQUIPMENT AND LABOR, FOR THE LANDSCAPE AREAS SHOWN ON THE DRAWING.
2. ALL QUESTIONS SHOULD BE REFERRED TO THE PROJECT LANDSCAPE ARCHITECT.
3. INFORMATION PROVIDED ON THIS PLAN IS GENERAL IN NATURE. DIMENSIONS, LOCATIONS, AND AREAS ARE APPROXIMATE AND SHOULD BE FIELD VERIFIED PRIOR TO BIDDING & INSTALLATION.
4. QUANTITIES SHOWN FOR PLANT MATERIALS ARE APPROXIMATE AND CONTRACTOR IS TO VERIFY. ACTUAL INSTALLED QUANTITIES OF PLANT MATERIALS MAY VARY FROM THE PLAN AND SHOULD BE FIELD DETERMINED ACCORDING TO THE GIVEN SPACING AND FIELD CONDITIONS. DISCREPANCIES BETWEEN FIELD CONDITIONS AND THE PLAN WHICH LIMIT THE CONTRACTOR SHOULD BE BROUGHT TO THE ATTENTION OF THE LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.
5. BY BIDDING, THE CONTRACTOR ACKNOWLEDGES THAT HE/SHE HAS SATISFIED HIMSELF/HERSELF AS TO THE NATURE AND LOCATION OF THE WORK AND TO THE QUALITY OF SURFACE AND SUBSURFACE MATERIALS OR OBSTACLES INsofar AS THIS DATA IS REASONABLY ASCERTAINABLE FROM AN INSPECTION OF THE SITE. ANY FAILURE BY THE CONTRACTOR TO ACQUAINT HIMSELF/HERSELF WITH THE AVAILABLE INFORMATION WILL NOT RELIEVE HIM/HER FROM RESPONSIBILITY FOR ESTIMATING PROPERLY THE DIFFICULTY OR COST OF SUCCESSFULLY PERFORMING THE WORK AS DESCRIBED.
6. INSTALLATION OF ALL LANDSCAPING MUST BE COORDINATED WITH THE INSTALLATION OF RELATED IRRIGATION, SITE WORK, SITE LIGHTING, SITE SIGNAGE AND GRADING.
7. UNLESS SPECIFICALLY NOTED, INSTALL ALL MASSES PLANTING UTILIZING EQUILATERAL TRIANGULAR SPACING. EDGE PLANTING BEDS INDICATED WITH STEEL EDGING BETWEEN MULCHED AREAS AND GRASS. EDGING NEED NOT BE INSTALLED BETWEEN CURBS OR WALLS AND LANDSCAPED AREAS.
8. FORM 3" DEEP EARTHEN SAUCERS AROUND ALL TREES. DO NOT INSTALL OTHER VEGETATION WITHIN THE SAUCER OF ANOTHER PLANT.
9. EVENLY APPLY 3" OF MULCH TO ALL CONTINUOUS PLANTING BEDS. TREES OCCURRING IN TURF AREAS SHOULD BE MULCHED WITHIN THE SOIL SAUCERS.
10. ALL IDENTIFICATION TAGS PROVIDED BY GROWERS AND PLACED ON TREES AND SHRUBS ARE TO REMAIN ON THE PLANTS THROUGH THE PUNCHLIST INSPECTION. TAGS ARE TO BE REMOVED PRIOR TO FINAL ACCEPTANCE, OR UPON REQUEST OF THE LANDSCAPE ARCHITECT.
11. ALL SODDING AND SEEDING OF LAWN AREAS IS TO BE COMPLETED AS A PART OF THE LANDSCAPE CONTRACT. A MINIMUM OF 4" OF QUALITY BROWN OR BLACK TOPSOIL IS TO BE PROVIDED FOR ALL SOD AND SEED AREAS.
12. EVENLY APPLY 3" OF ORGANIC COMPOST TO ALL PLANTING AREAS AND TILL INTO EXISTING SOIL TO A DEPTH OF 12" PRIOR TO PLANTING. BACKFILL RAISED PLANTERS AGAINST PORCH WITH PLANTING MIX CONSISTING OF 50% QUALITY TOPSOIL, 30% COMPOST, 10% SAND, AND 10% DECOMPOSED GRANITE.
13. ALL LANDSCAPED AREAS ARE TO IRRIGATED WITH AN UNDERGROUND AUTOMATIC IRRIGATION SYSTEM BY CONTRACTOR. IRRIGATION CONTRACTOR IS TO BE A STATE OF TEXAS LICENSED IRRIGATOR, AND IS TO FOLLOW TCO2.
14. PROVIDE REGULAR MAINTENANCE OF ALL LANDSCAPE AREAS AND PLANT MATERIALS IN A VIGOROUS AND HEALTHY CONDITION, FREE FROM DISEASES, PEST WEEDS, AND LITTER. THIS MAINTENANCE SHALL INCLUDE WEEDING, WATERING, FERTILIZATION, PRUNING, MOWING, EDGING, MULCHING OR OTHER NEEDED MAINTENANCE, IN ACCORDING WITH GENERALLY ACCEPTED HORTICULTURAL PRACTICES UNTIL THE PROJECT HAS BEEN ACCEPTED BY THE OWNER AND LANDSCAPE ARCHITECT.
15. REPAIR OR REPLACE REQUIRED LANDSCAPE STRUCTURES (WALLS, FENCES, ETC.) IF DAMAGED. CONTRACTOR TO INSURE THAT ALL WORK IS STRUCTURALLY SOUND AND REPLACED TO ORIGINAL CONDITION.

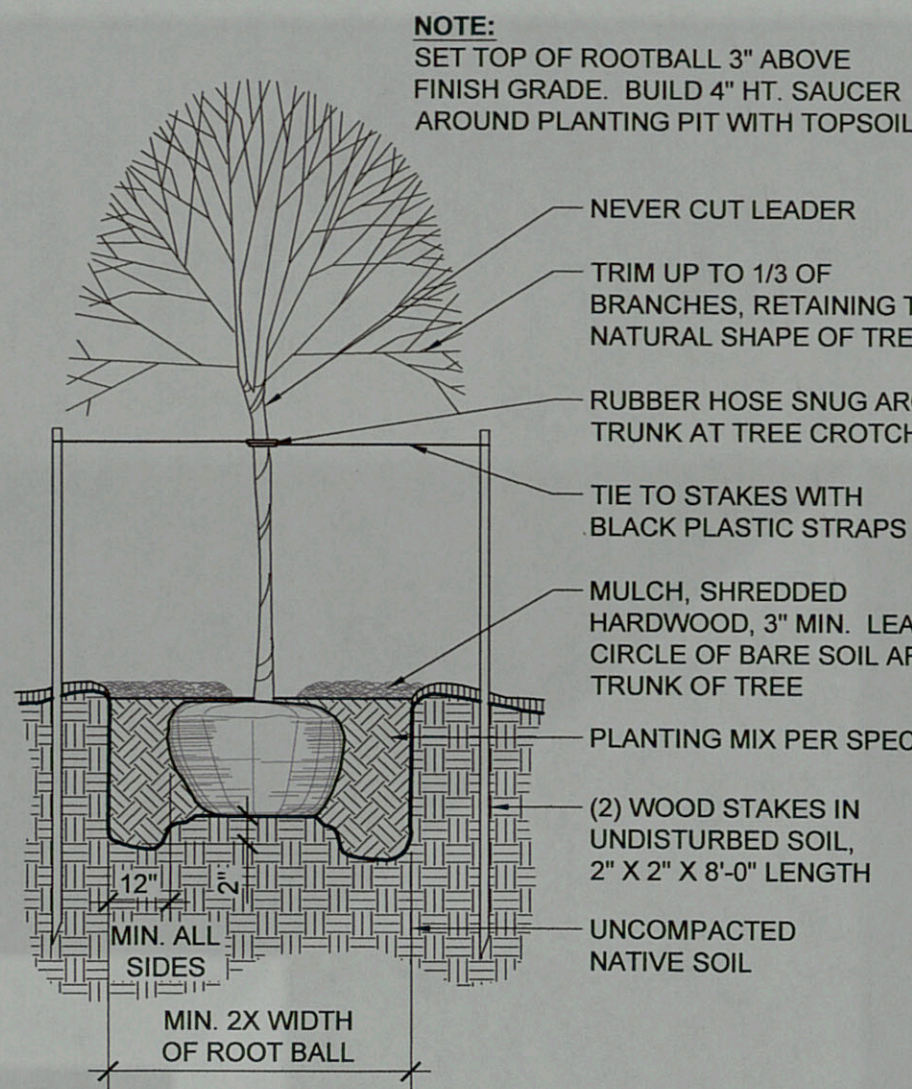


1 TREE PLANTING DETAIL

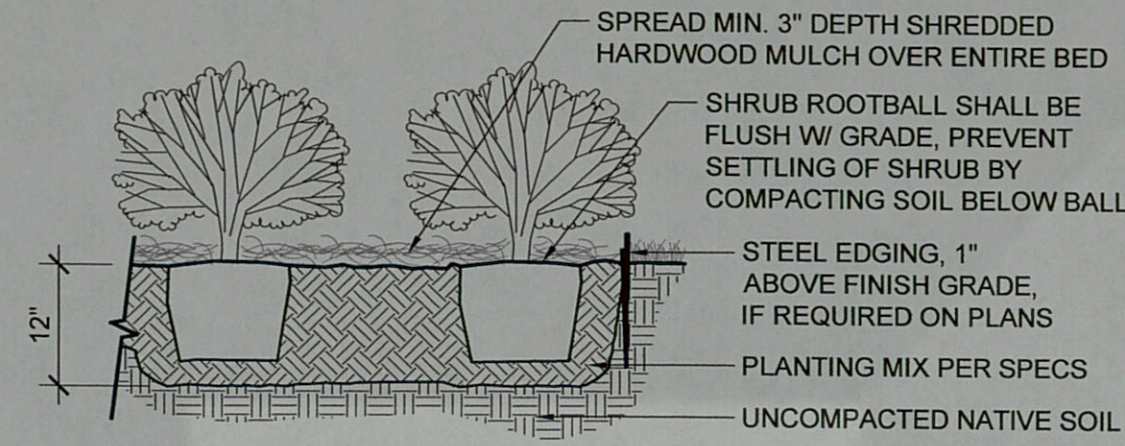


2 SHRUB PLANTING DETAIL

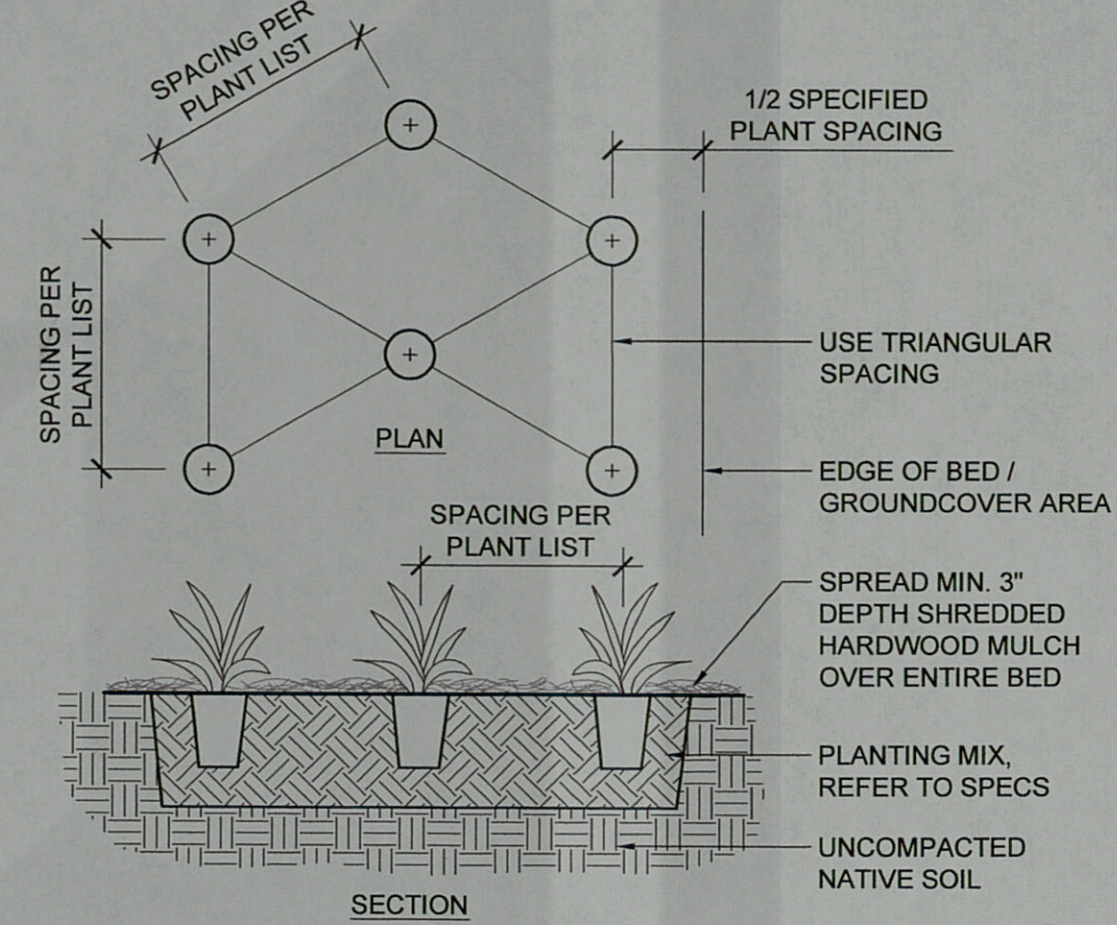


3 GROUNDCOVER PLANTING DETAIL

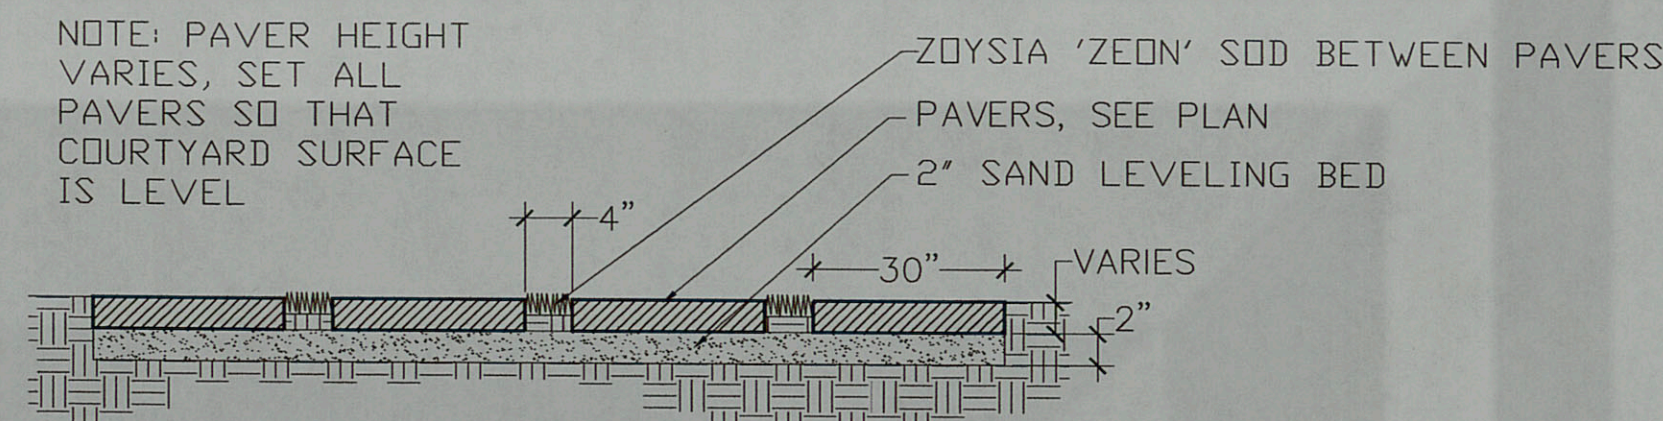

4 PAVER INSTALLATION DETAIL

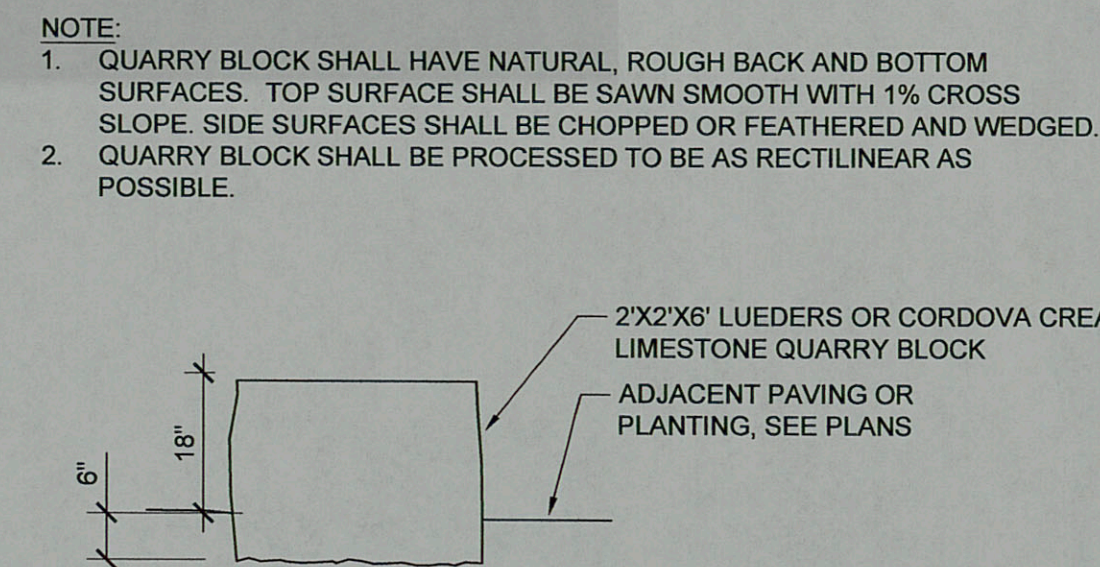

5 STONE BENCH DETAIL

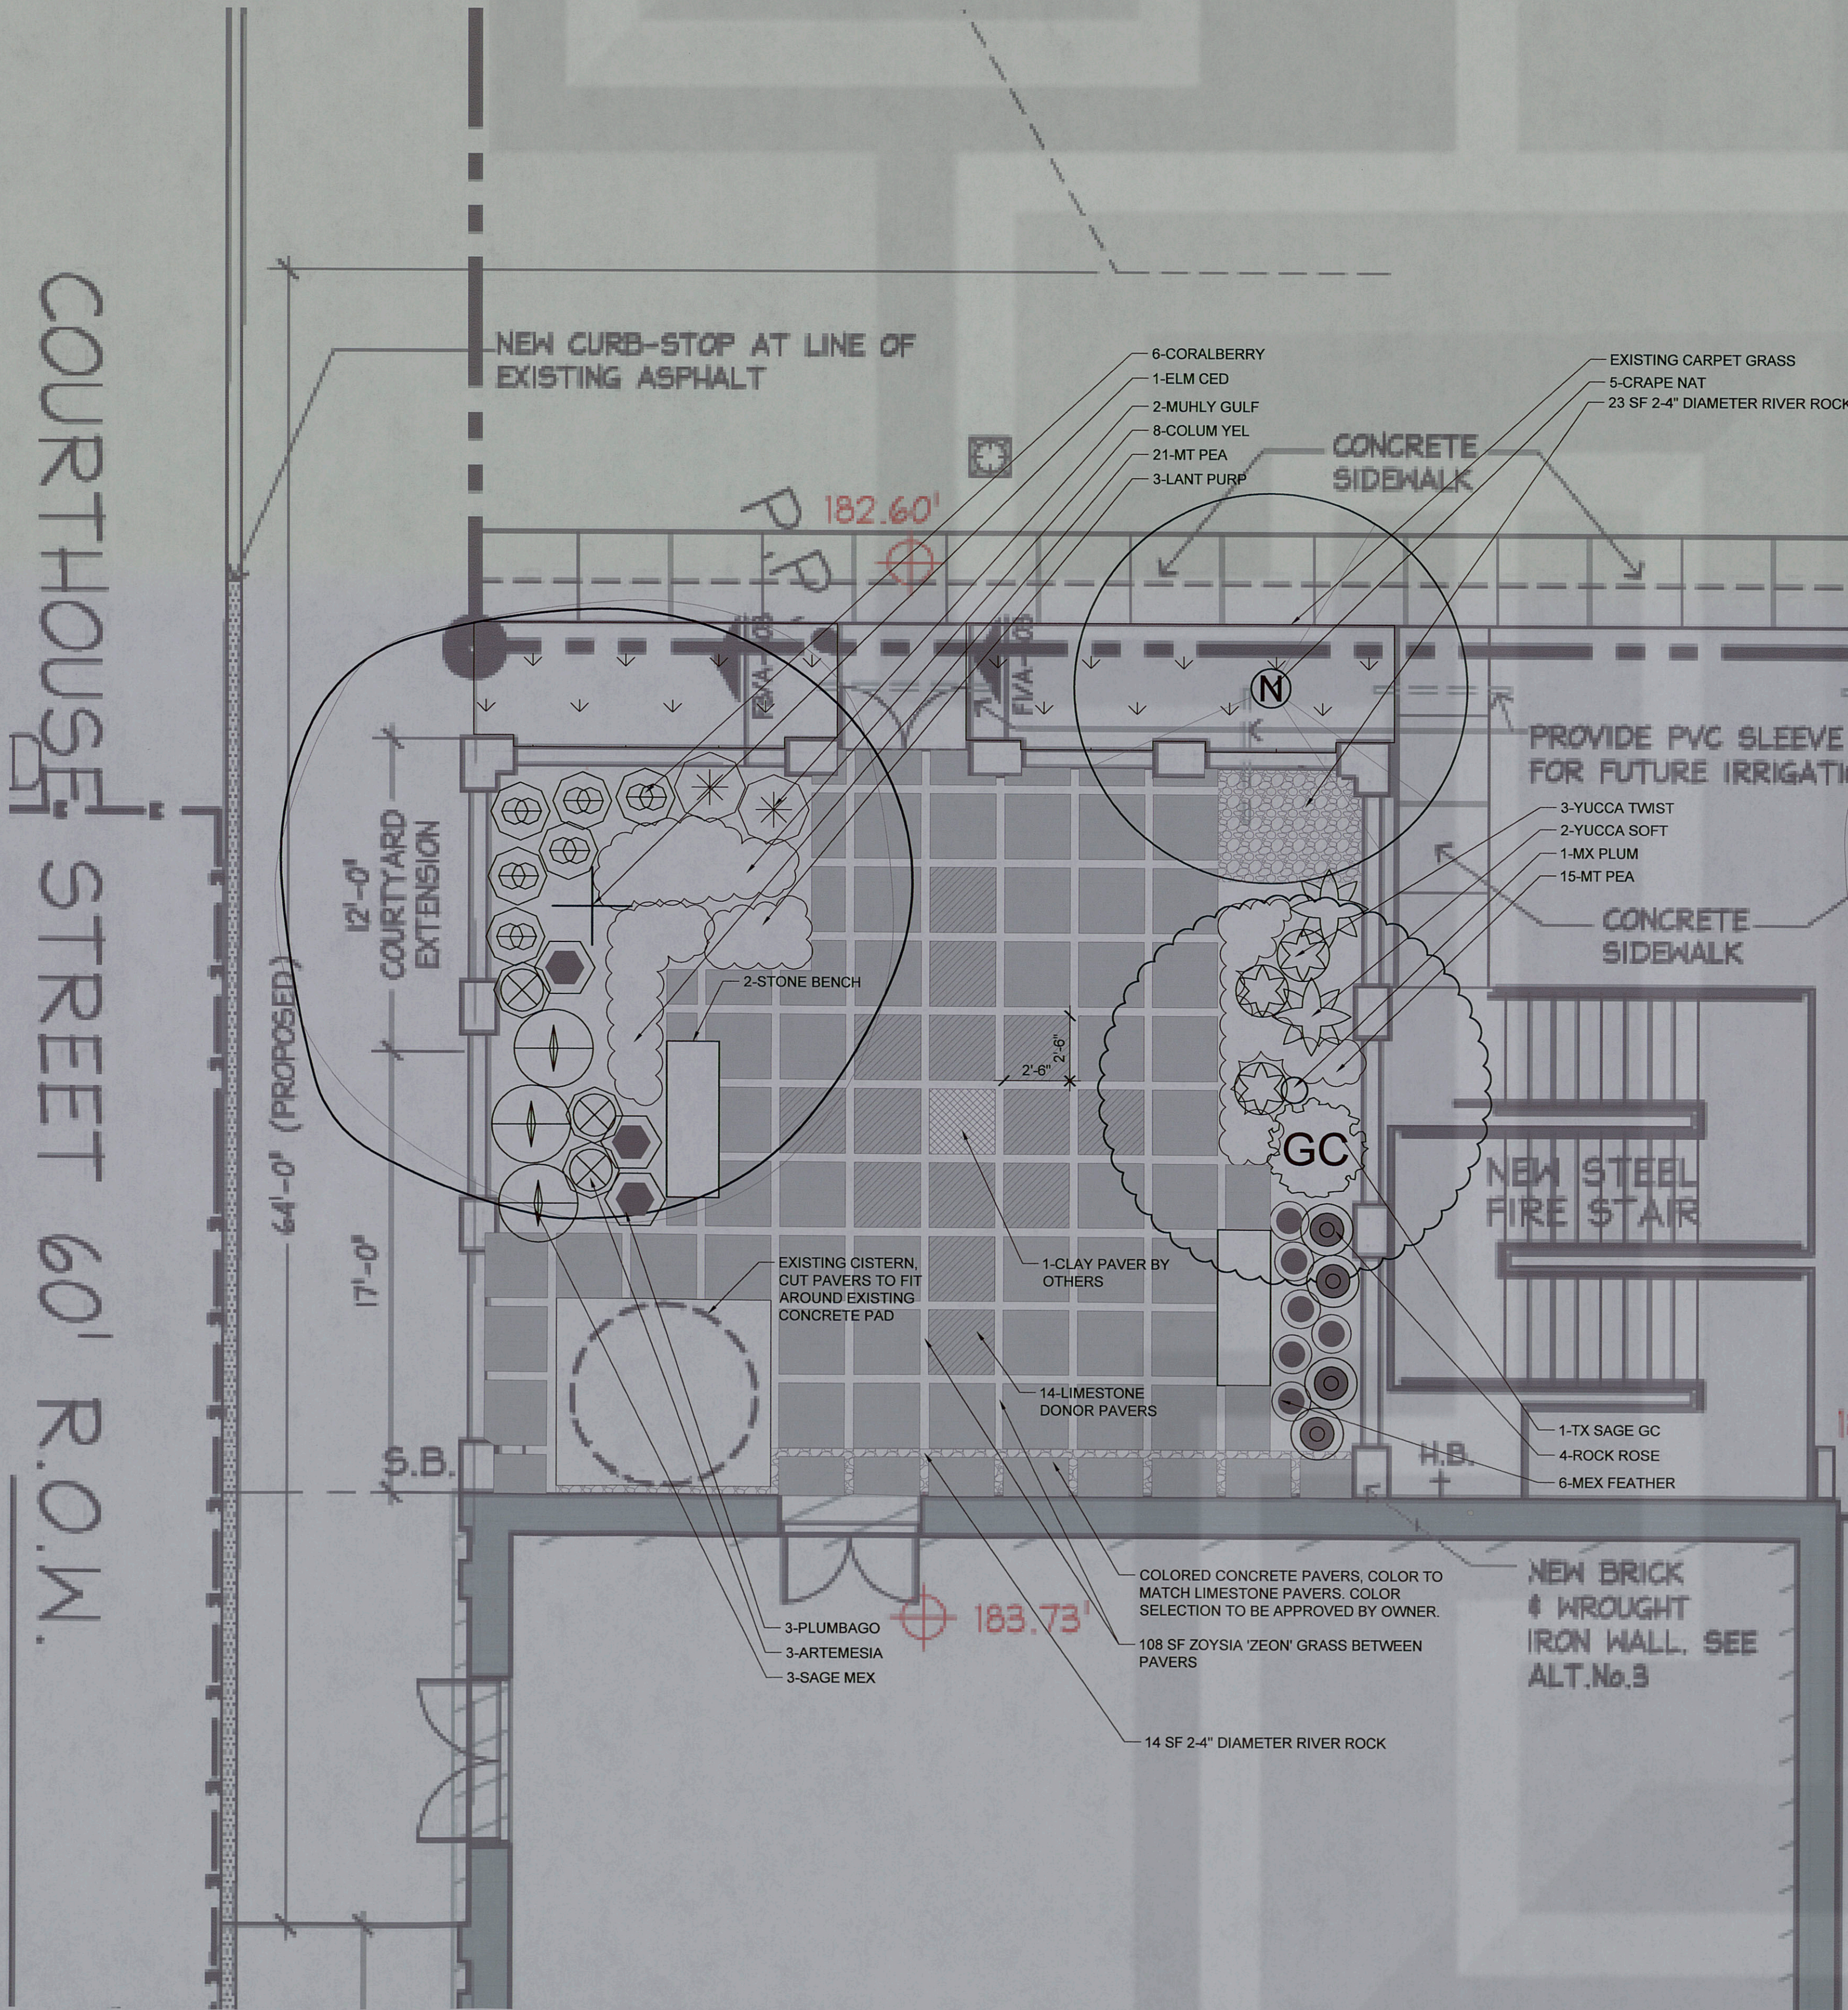

SHADE TREES

CALLOUT	COMMON NAME	BOTANICAL NAME	SIZE	CONT/ B&B	SPACING	REMARKS	QTY.
ELM CED	CEDAR ELM	ULMUS CRASSIFOLIA	6\" CAL	B&B OR NURS.	PER PLANS	16\" HT X 6\" SPR	PER PLANS

ORNAMENTAL TREES

CALLOUT	COMMON NAME	BOTANICAL NAME	SIZE	CONT/ B&B	SPACING	REMARKS	QTY.
CRAPE NAT	CRAPE MYRTLE 'NATCHEZ'	LAGERSTROEMIA X FAURIEI 'NATCHEZ'	30 GAL.	CONT.	PER PLANS	12' HT	PER PLANS
MX PLUM	MEXICAN PLUM	PRUNUS MEXICANA	30 GAL.	CONT.	PER PLANS	8' HT.	PER PLANS

SHRUBS, LARGE PERENNIALS

CALLOUT	COMMON NAME	BOTANICAL NAME	SIZE	CONT/ B&B	SPACING	REMARKS	QTY.
ARTEMESIA	ARTEMISIA 'POWIS CASTLE'	ARTEMESIA LUDOVICIANA 'POWIS CASTLE'	1 GAL.	CONT.	2' O.C.	12\" HT X 12\" SPR	PER PLANS
CORALBERRY	CORALBERRY	SYMPHORICARPOS ORBICULATUS	1 GAL.	CONT.	2' O.C.	10\" HT X 10\" SPR	PER PLANS
PLUMBAGO	PLUMBAGO	PLUMBAGO ARICULATA	1 GAL.	CONT.	2' O.C.	10\" HT X 12\" SPR	PER PLANS
ROCK ROSE	ROCK ROSE	PARVONIA LASIOPETALA	1 GAL.	CONT.	2' O.C.	12\" HT X 12\" SPR	PER PLANS
SAGE MEX	MEXICAN BUSH SAGE	SALVIA LEUCANTHA	5 GAL.	CONT.	3' O.C.	2\" HT X 18\" SPR	PER PLANS
TX SAGE GC	TEXAS SAGE 'GREEN CLOUD'	LEUCOPHYLLUM FRUTESCENS 'GREEN CLOUD'	5 GAL.	CONT.	4' O.C.	2\" HT X 2\" SPR	PER PLANS
YUCCA TWIST	TWISTLEAF YUCCA	YUCCA RUPICOLA	1 GAL.	CONT.	2' O.C.	9\" HT X 12\" SPR	PER PLANS

GRASSES


CALLOUT	COMMON NAME	BOTANICAL NAME	SIZE	CONT/ B&B	SPACING	REMARKS	QTY.
MUHLY GULF	GULF COAST MUHLY	MUHLENBERGIA CAPILLARIS	5 GAL.	CONT.	2.5' O.C.	20\" HT X 20\" SPR	PER PLANS
ZOYSIA ZEON	ZOYSIA 'ZEON'	ZOYSIA X 'ZEON'	N/A	SOLID SOD	N/A		PER PLANS

GROUNDCOVERS, SMALL PERENNIALS

CALLOUT	COMMON NAME	BOTANICAL NAME	SIZE	CONT/ B&B	SPACING	REMARKS	QTY.
COLUM YEL	HINCKLEY'S COLUMBINE	AQUILEGIA HINCKLEYANA	1 GAL.	CONT.	18\" O.C.	10\" HT X 10\" SPR	PER PLANS
FERN RIV	RIVER FERN	THELPTERIS KUNTHII	1 GAL.	CONT.	2' O.C.	12\" HT X 12\" SPR	PER PLANS
LANT PURP	PURPLE TRAILING LANTANA	LANTANA MONTEVIDENSIS	1 GAL.	CONT.	2' O.C.	8\" HT X 10\" SPR	PER PLANS
MT PEA	MOUNTAIN PEA	OREBEXLIUM PENDUNCULATUM	4\" POT	CONT.	12\" O.C.	4\" HT X 4\" SPR	PER PLANS



3718 MANCHACA ROAD
AUSTIN, TEXAS 78704
P 512.440.1049
F 512.440.8000
www.JRobertAnderson.com

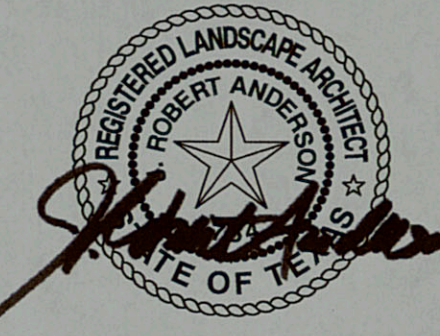

Revisions:			
No.	Date	By	Comments

CHISHOLM TRAIL HERITAGE MUSEUM

307 N. ESPLANADE
CUERO, TEXAS

PLANTING PLAN

Issue Date:	10/3/2011	Issue For:	Construction
Drawn By:	AMW	Checked By:	JRA
Sheet Number:			

L-2

SCALE: 3/8\"/>