



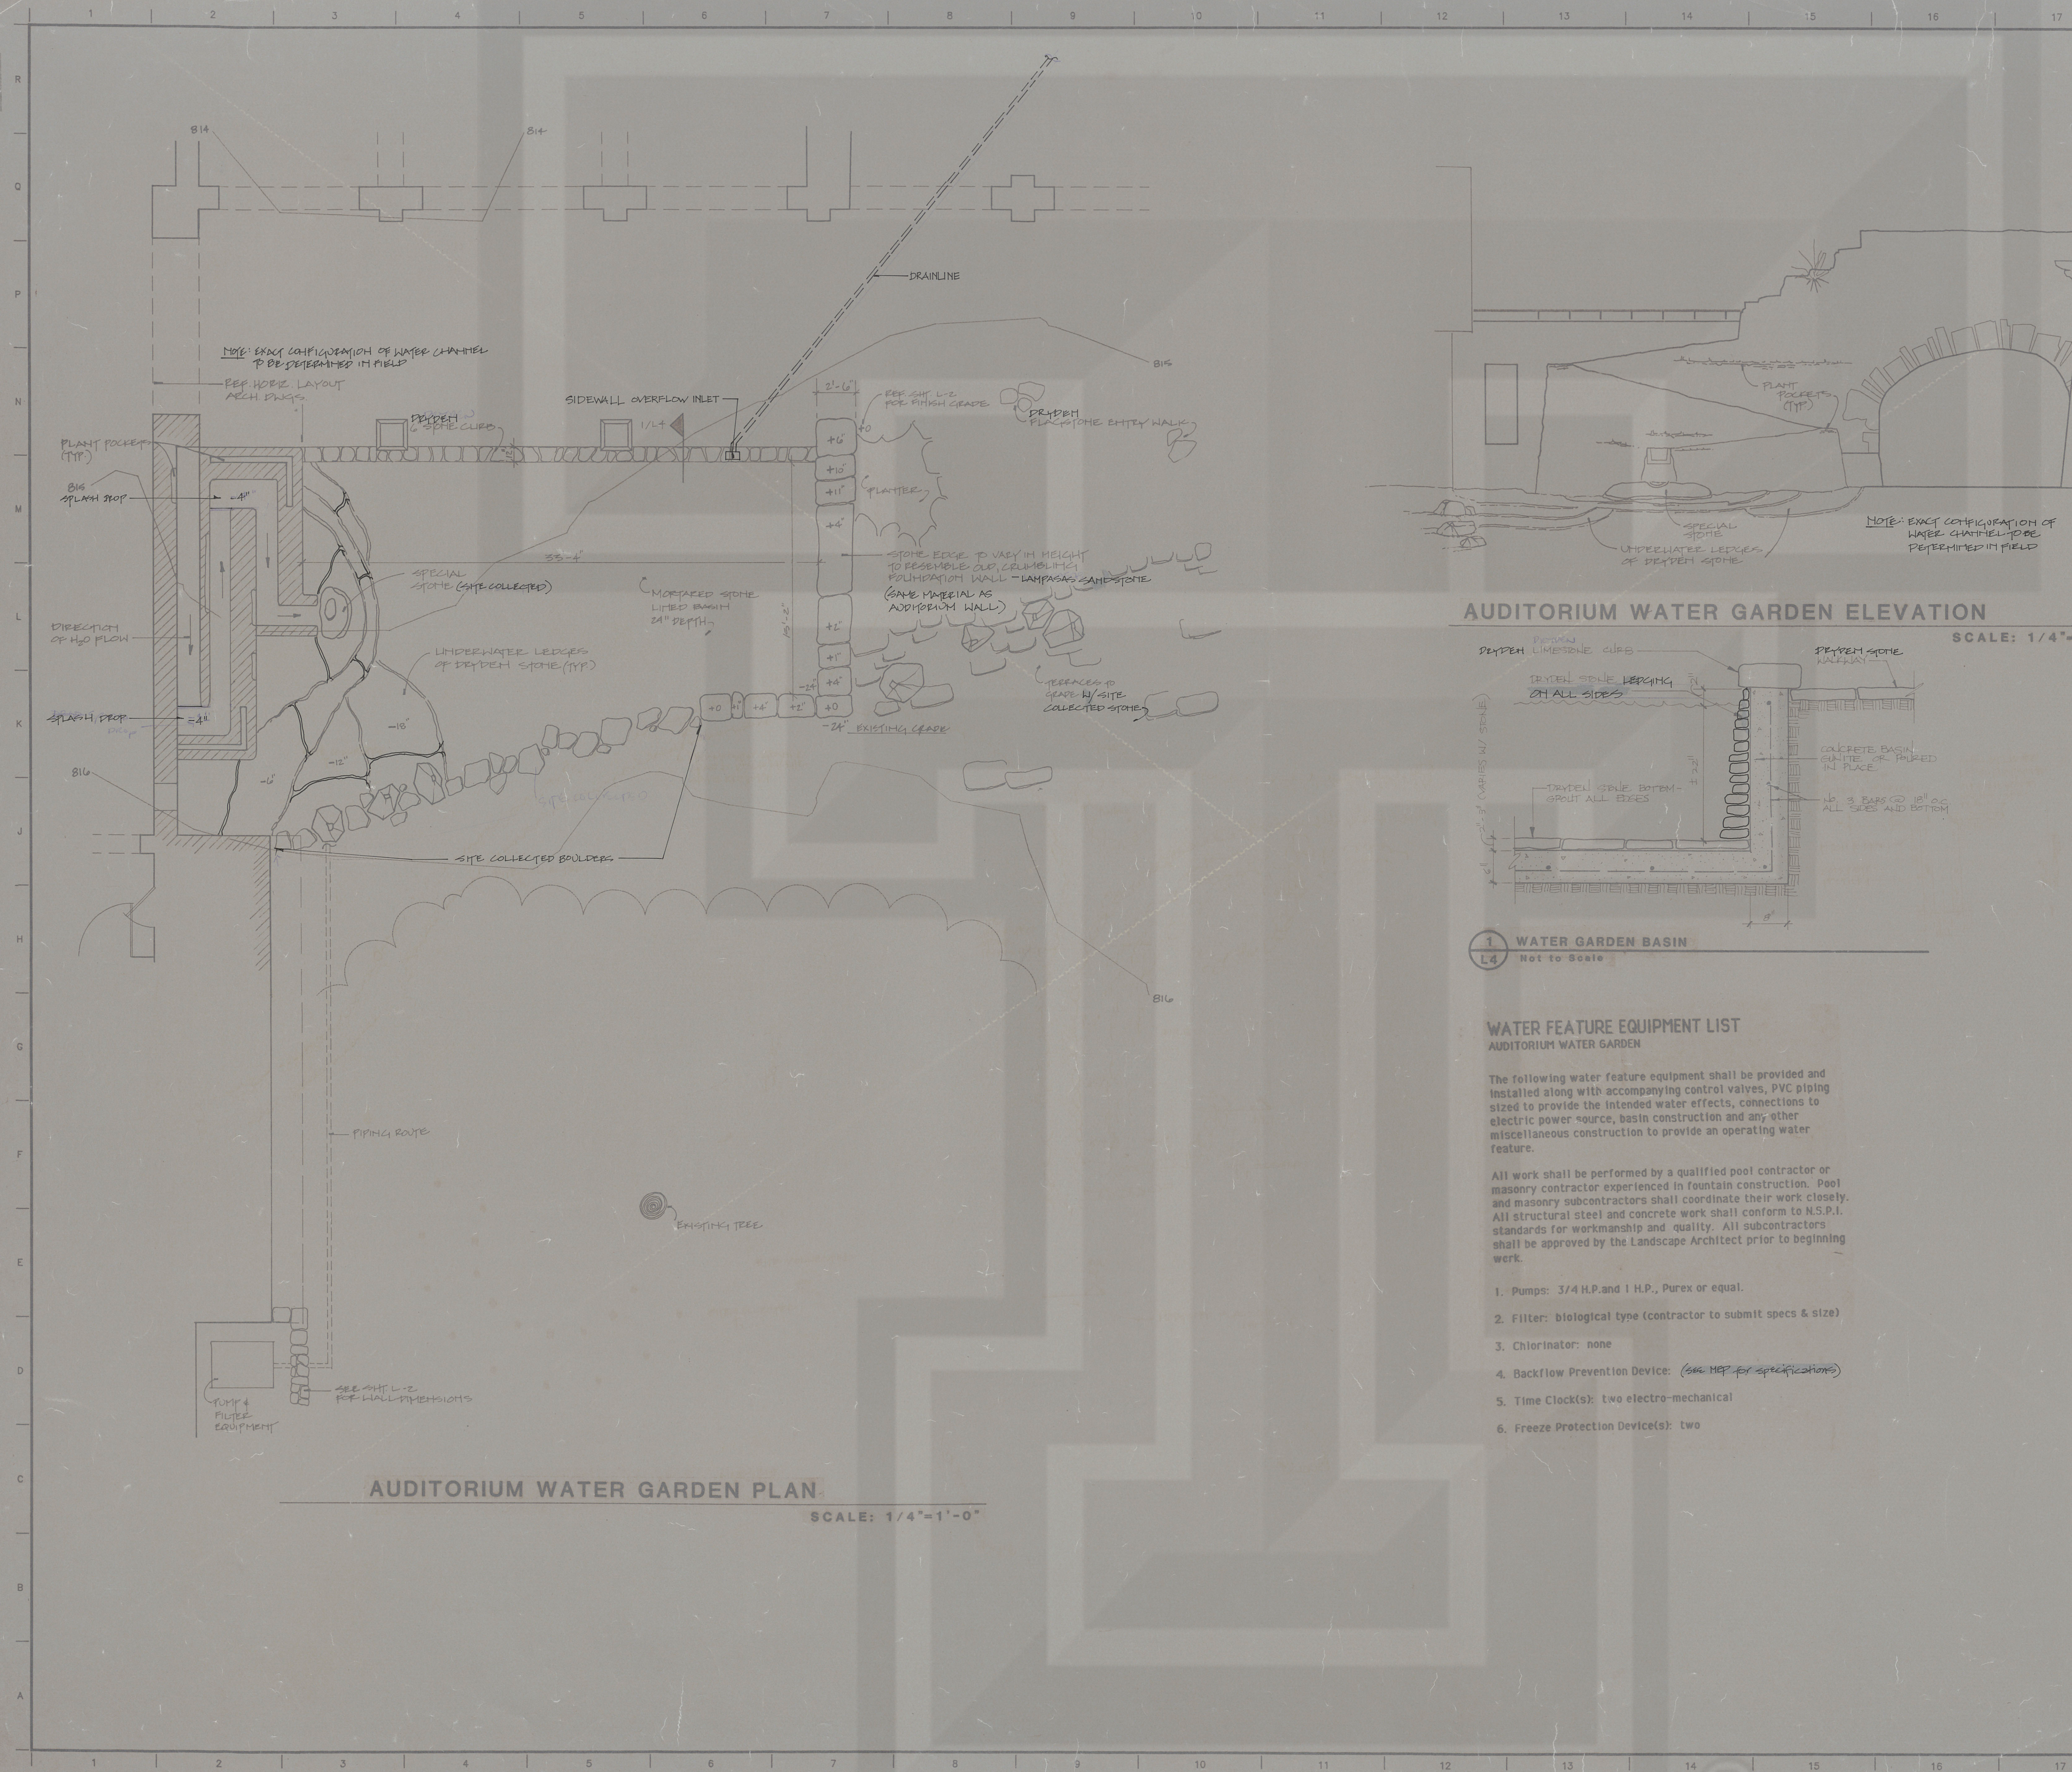


AUDITORIUM WATER GARDEN PLAN

SCALE: 1/4"=1'-0"

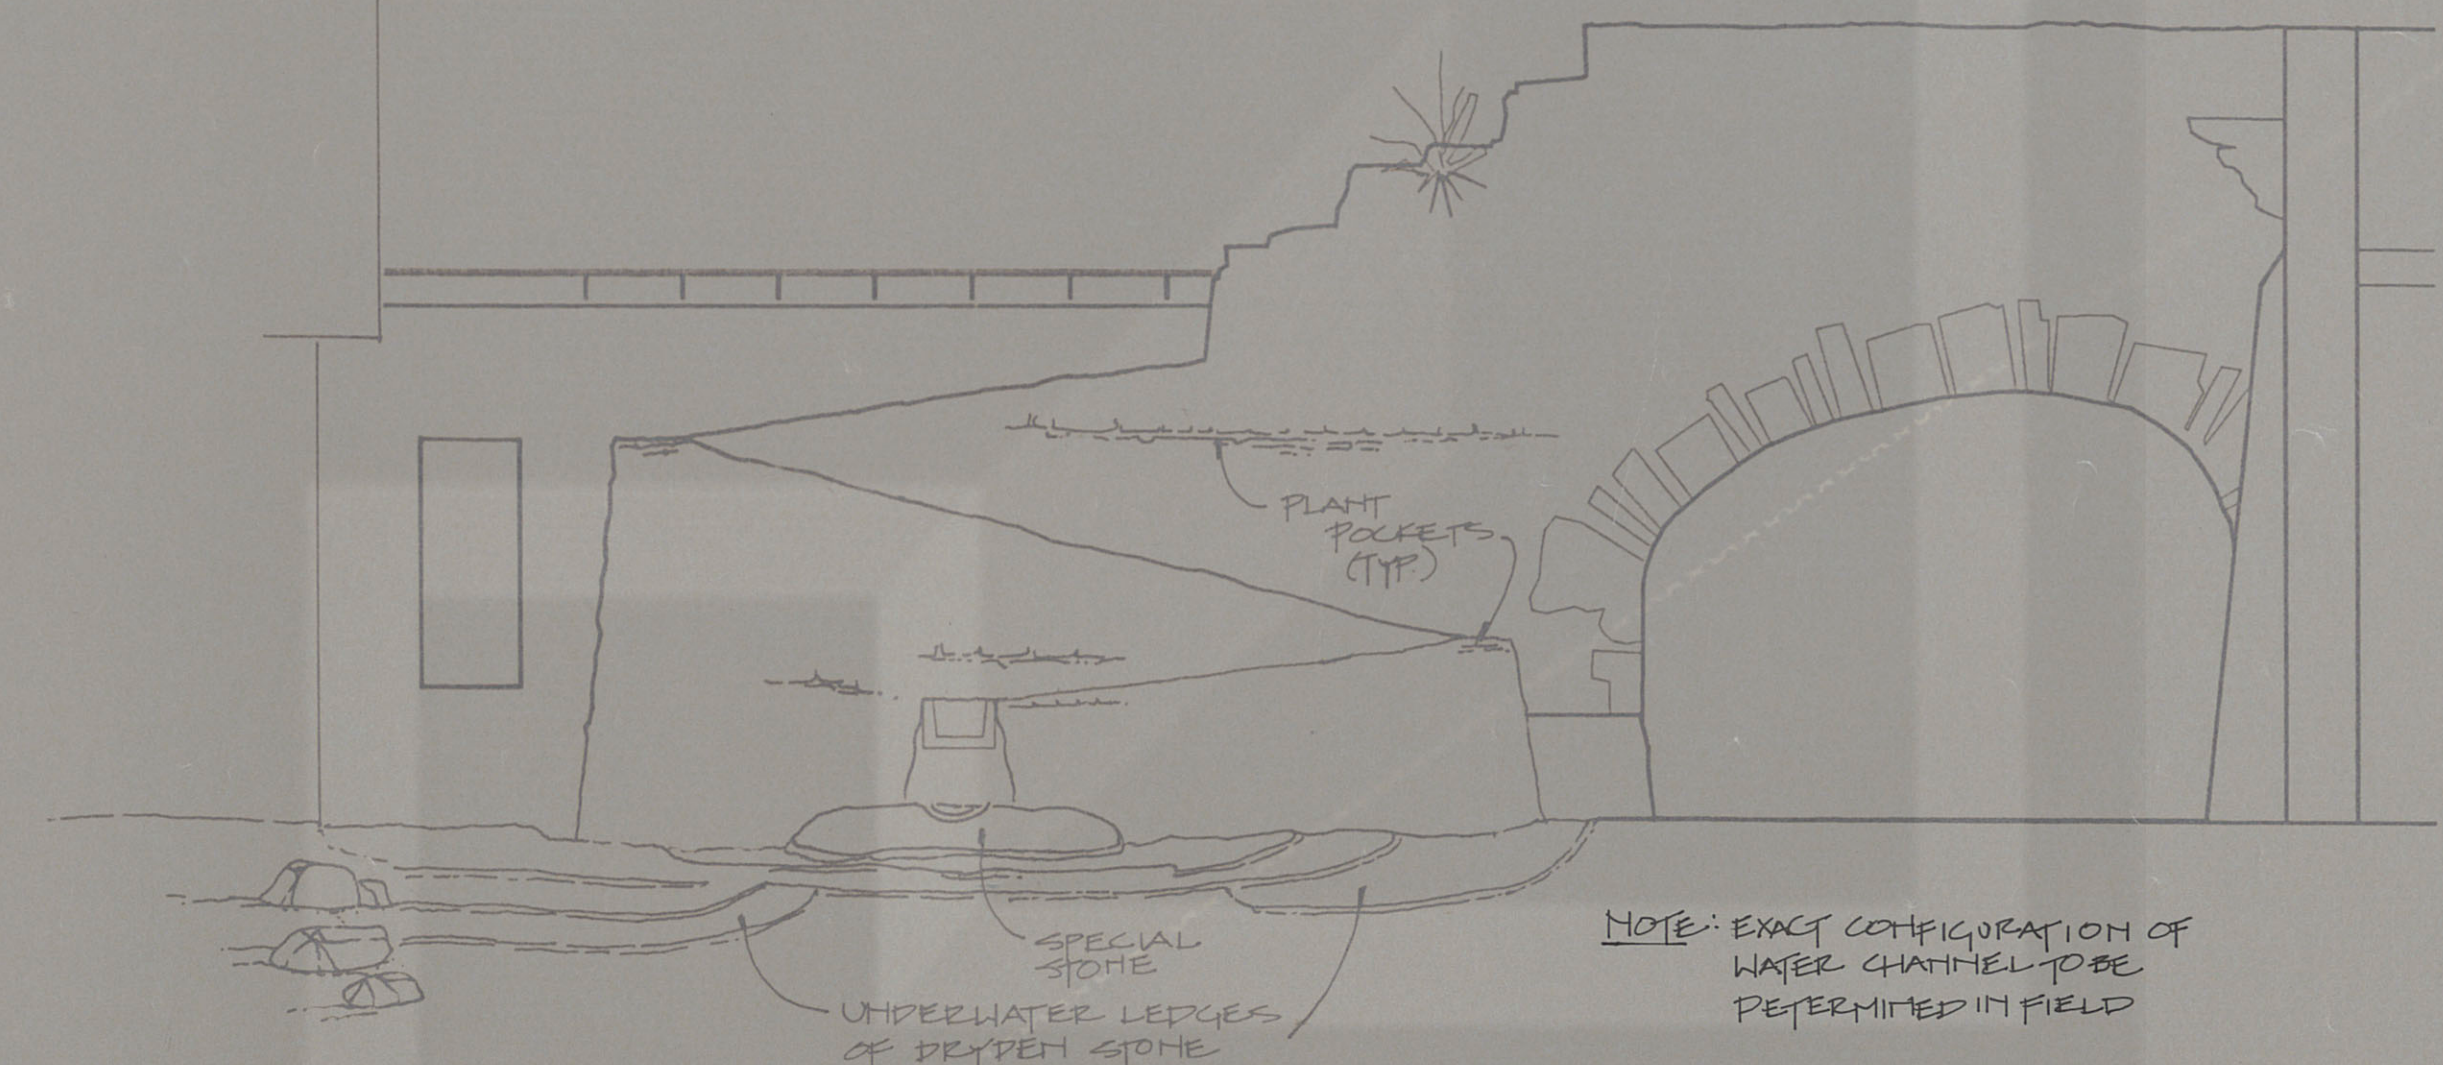

AUDITORIUM WATER GARDEN ELEVATION

SCALE: 1/4"=1'-0"

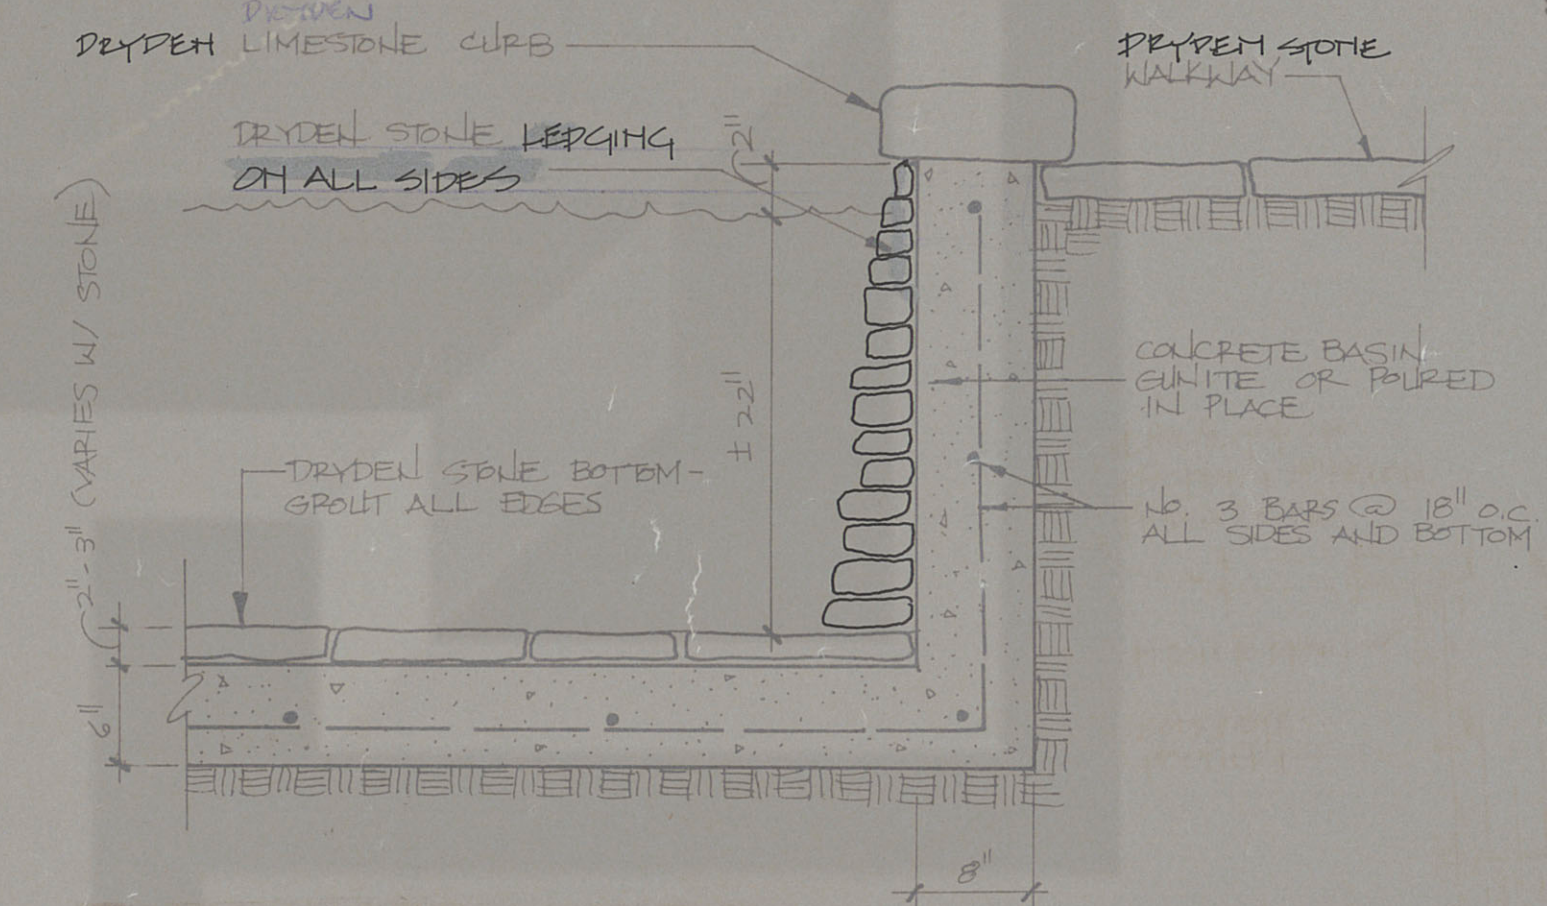


1 WATER GARDEN BASIN
L4 Not to Scale

WATER FEATURE EQUIPMENT LIST
AUDITORIUM WATER GARDEN


The following water feature equipment shall be provided and installed along with accompanying control valves, PVC piping sized to provide the intended water effects, connections to electric power source, basin construction and any other miscellaneous construction to provide an operating water feature.

All work shall be performed by a qualified pool contractor or masonry contractor experienced in fountain construction. Pool and masonry subcontractors shall coordinate their work closely. All structural steel and concrete work shall conform to N.S.P.I. standards for workmanship and quality. All subcontractors shall be approved by the Landscape Architect prior to beginning work.

1. Pumps: 3/4 H.P. and 1 H.P., Purex or equal.
2. Filter: biological type (contractor to submit specs & size)
3. Chlorinator: none
4. Backflow Prevention Device: (SEE MEP FOR SPECIFICATIONS)
5. Time Clock(s): two electro-mechanical
6. Freeze Protection Device(s): two

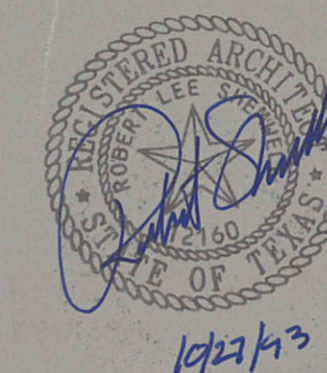

THE ARCHITECT'S SEAL ON THIS CONSULTANT'S DOCUMENT ATTESTS TO THE ARCHITECT'S COORDINATION OF THE CONSULTANT'S WORK WITH THAT OF THE ARCHITECTS AND DOES NOT IMPLY THE ARCHITECT'S PRACTICE OF ENGINEERING OR OTHER CONSULTANT'S SPECIALTY.

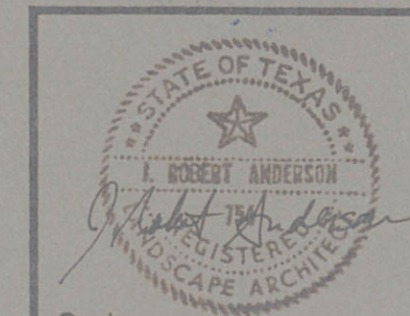

ISSUED FOR CONSTRUCTION 11/30/93
REVISED 1/13/94

7/26/93
Issued / Revised



J. ROBERT ANDERSON, ASLA
Landscape Architect
1135 W. Sixth Street, Suite 120
Austin, Texas 78703
(512) 476-1777

NATIONAL WILDFLOWER
RESEARCH CENTER

Project Name	Project No.
AUDITORIUM WATER GARDEN PLAN + DETAILS	Drawn EHM Drawing No.
SCALE VARIES	L-4 of
Drawing Title	