


LANDSCAPE NOTES


1. COMPLETE ALL LANDSCAPE PLANTING AND RELATED BARTHWORX INCLUDING ALL PRODUCTS, EQUIPMENT AND LABOR, FOR THE LANDSCAPE AREAS SHOWN ON THE DRAWING AND DESCRIBED IN THE SPECIFICATIONS.
2. ALL QUESTIONS SHOULD BE REFERRED TO THE PROJECT LANDSCAPE ARCHITECT.
3. INFORMATION PROVIDED ON THIS PLAN IS GENERAL IN NATURE. DIMENSIONS, LOCATIONS, AND AREAS ARE APPROXIMATE AND SHOULD BE FIELD VERIFIED PRIOR TO BIDDING & INSTALLATION.
4. QUANTITIES SHOWN FOR PLANT MATERIALS ARE APPROXIMATE. ACTUAL INSTALL TO QUANTITIES OF PLANT MATERIALS MAY VARY FROM THE PLAN AND SHOULD BE FIELD DETERMINED ACCORDING TO THE GIVEN SPACING AND FIELD CONDITIONS. DISCREPANCIES BETWEEN FIELD CONDITIONS AND THE PLAN WHICH LIMIT THE CONTRACTOR SHOULD BE BROUGHT TO THE ATTENTION OF THE LANDSCAPE ARCHITECT PRIOR TO INSTALLATION. MINOR ADJUSTMENTS OF BE CONSIDERED A PART OF THE BASE BID.
5. BY BIDDING, THE CONTRACTOR ACKNOWLEDGES THAT HE/HIS HAS SATISFIED HIMSELF/HERSELF AS TO THE NATURE AND LOCATION OF THE WORK AND TO THE QUALITY OF SURFACE AND SUBSURFACE MATERIALS OR OBSTACLES INsofar AS THIS DATA IS REASONABLY ASCERTAINABLE FROM AN INSPECTION OF THE SITE. ANY FAILURE BY THE CONTRACTOR TO ACQUANT HIMSELF/HERSELF WITH THE AVAILABLE INFORMATION WILL NOT RELIEVE HIM/HER FROM RESPONSIBILITY FOR ESTIMATING PROPERLY THE DIFFICULTY OR COST OF SUCCESSFULLY PERFORMING THE WORK AS DESCRIBED.
6. INSTALLATION OF ALL LANDSCAPING MUST BE COORDINATED WITH THE INSTALLATION OF RELATED IRRIGATION, SITE WORK, AND GRADING.
7. UNLESS SPECIFICALLY NOTED, INSTALL ALL MASSSED PLANTING UTILIZING EQUILATERAL TRIANGULAR SPACING. EDGE ALL PLANTING BEDS WITH STEEL OR STONE EDGING BETWEEN MULCHED AREAS AND GRASS. EDGING NEED NOT BE INSTALLED BETWEEN CURBS OR WALLS AND LANDSCAPED AREAS.
8. FORM 3" DEEP EARTHEN SAUCERS AROUND ALL TREES. DO NOT INSTALL OTHER VEGETATION WITHIN THE SAUCER OR ANOTHER PLANT.
9. EVENLY APPLY 3" OF MULCH TO ALL CONTINUOUS PLANTING BEDS. TREES OCCURRING IN TURF AREAS SHOULD BE MULCHED WITHIN THE SOIL SAUCERS.
10. SUBSTITUTIONS OF PLANT SPECIES, SIZES, OR OTHER SPECIFIED MATERIALS WILL NOT BE ALLOWED WITHOUT PRIOR APPROVAL BY THE LANDSCAPE ARCHITECT.
11. PLANT MATERIAL AND LAYOUT MUST BE APPROVED BY THE LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.
12. ALL IDENTIFICATION TAGS PROVIDED BY GROWERS AND PLACED ON TREES AND SHRUBS ARE TO REMAIN ON THE PLANTS THROUGH THE PUNCH LIST INSPECTION. TAGS ARE TO BE REMOVED PRIOR TO FINAL ACCEPTANCE, OR UPON REQUEST OF THE LANDSCAPE ARCHITECT.
13. ALL SEEDING OF LAWN AREAS IS TO BE COMPLETED AS A PART OF THE LANDSCAPE CONTRACT. A MINIMUM OF 2" OF QUALITY BROWN OR BLACK TOPSOIL IS TO BE PROVIDED FOR ALL SOD AND SEED AREAS.
14. TOPSOIL AND SEEDING ARE TO BE APPLIED TO ALL CONSTRUCTION-DAMAGED GROUND SURFACES NOT OTHERWISE PLANTED. CONTRACTOR SHALL REVIEW RELATED CONSTRUCTION DRAWINGS FOR LIMITS OF CONSTRUCTION AND SHALL ALSO BE RESPONSIBLE FOR COORDINATING WITH OTHER SITE CONTRACTORS TO DETERMINE ACTUAL AREAS OF SEEDING REQUIRED.
15. INCLUDING AREAS DISTURBED BY UTILITY EXTENSIONS.
16. REFER TO THE SPECIFICATIONS FOR SOIL BACKFILL MATURES.
17. ALL PLANT MATERIALS TO BE GUARANTEED FOR A ONE-YEAR PERIOD FOLLOWING FINAL ACCEPTANCE. UPON NOTIFICATION FROM THE OWNER, THE LANDSCAPE CONTRACTOR SHALL REPLACE DEAD OR PARTIALLY DEAD PLANTS WITH SAME SPECIFIED PLANTS, AND REPLACEMENTS SHALL LIKEWISE BE GUARANTEED FOR ONE-YEAR FOLLOWING INSTALLATION. GUARANTEE SHALL NOT INCLUDE PLANTS DAMAGED BY ABNORMAL FREEZES, HAIL, ABNORMALLY HIGH WINDS, VANDALISM OR OWNERS NEGLIGENCE IN MAINTENANCE.
18. THE CONTRACTOR IS RESPONSIBLE FOR THE SECURITY OF ALL MATERIALS AND EQUIPMENT UNTIL FINAL ACCEPTANCE OF THE LANDSCAPING.

PLANTING LEGEND

No.	Common Name	Scientific Name	Size	Spacing
Trees				
25	LIVE OAK	QUERCUS VIRGINIANA	3" CAL., 12 FT., 38" BOX, SINGLE TRUNK, 7'-8" CLEAR TRUNK	20' O.C. AS SHOWN
3	CEDEAR ELM	ULMUS CRASSIFOLIA	3" CAL., 12 FT., 38" BOX, SINGLE TRUNK, 7'-8" CLEAR TRUNK	20' O.C.
2	RED BUD	CERCIS CANADENSIS	3" CAL., 12 FT., 42" BOX, SINGLE TRUNK, 7'-8" CLEAR TRUNK	15' O.C.
Shrubs				
77	BIG MUHLY	LINDHEIMER MUHLY	5 GAL. FULL	7' O.C.
80	DWARF BURFORD HOLLY	ILEX CORNUTA DWARF BURFORD	5 GAL., 24" x 24"	24" O.C.
101	DWARF YALPON HOLLY	ILEX VOMITORIA 'DWARF'	5 GAL., 18" x 24"	24" O.C.
63	SALVIA - COMPACT ORANGE	SALVIA	3 GAL. FULL	24" O.C.
248	WAX MYRTLE	MYRTICA CERIFERA	7 GAL. FULL TO GROUND	4' O.C.
25	LANTANA-RADIATION	LANTANA CAMARA	5 GAL., 24" x 24"	24" O.C.
72	ROSEMARY	ROSEMARY OFFICINALIS	5 GAL., 18" x 18"	18" O.C.
Ground Cover/Vines				
89	TRUMPET VINE	CAMPIDIS TAGLIABUANA	5 GAL. FULL, STAGED	8' O.C.
77	CAROLINA JESSAMINE	DESMULUM BEMPERVIRENS	5 GAL. FULL, STAGED	12" O.C. w/ 8' O.C. AS SHOWN
16	VIRGINIA CREEPER	PARthenocissus HEPTAPHYLLA	1 GAL. FULL, STAGED	12" O.C.
30	CROSS VINE	DIODORA CARPULATA	1 GAL. FULL, STAGED	8' O.C.
88	CORAL VINEYBUCKLE	LONCERA BEMPERVIRENS	1 GAL. FULL, STAGED	8' O.C.
428	ASIAN JASMINE	TRACHELOSPERMAN ASIATICUM	4" POTS	12" O.C.
Turf Grass				
81.884 S.F.	HYDROSEED BERMUDA	CYNODON DACTYLON	HYDROMULCH @ 1 LB. / 1000 SQUARE FEET	AS SHOWN
3,217 L.F.	STEEL EDGING			
255 L.F.	EXTRUDED CONCRETE EDGING			

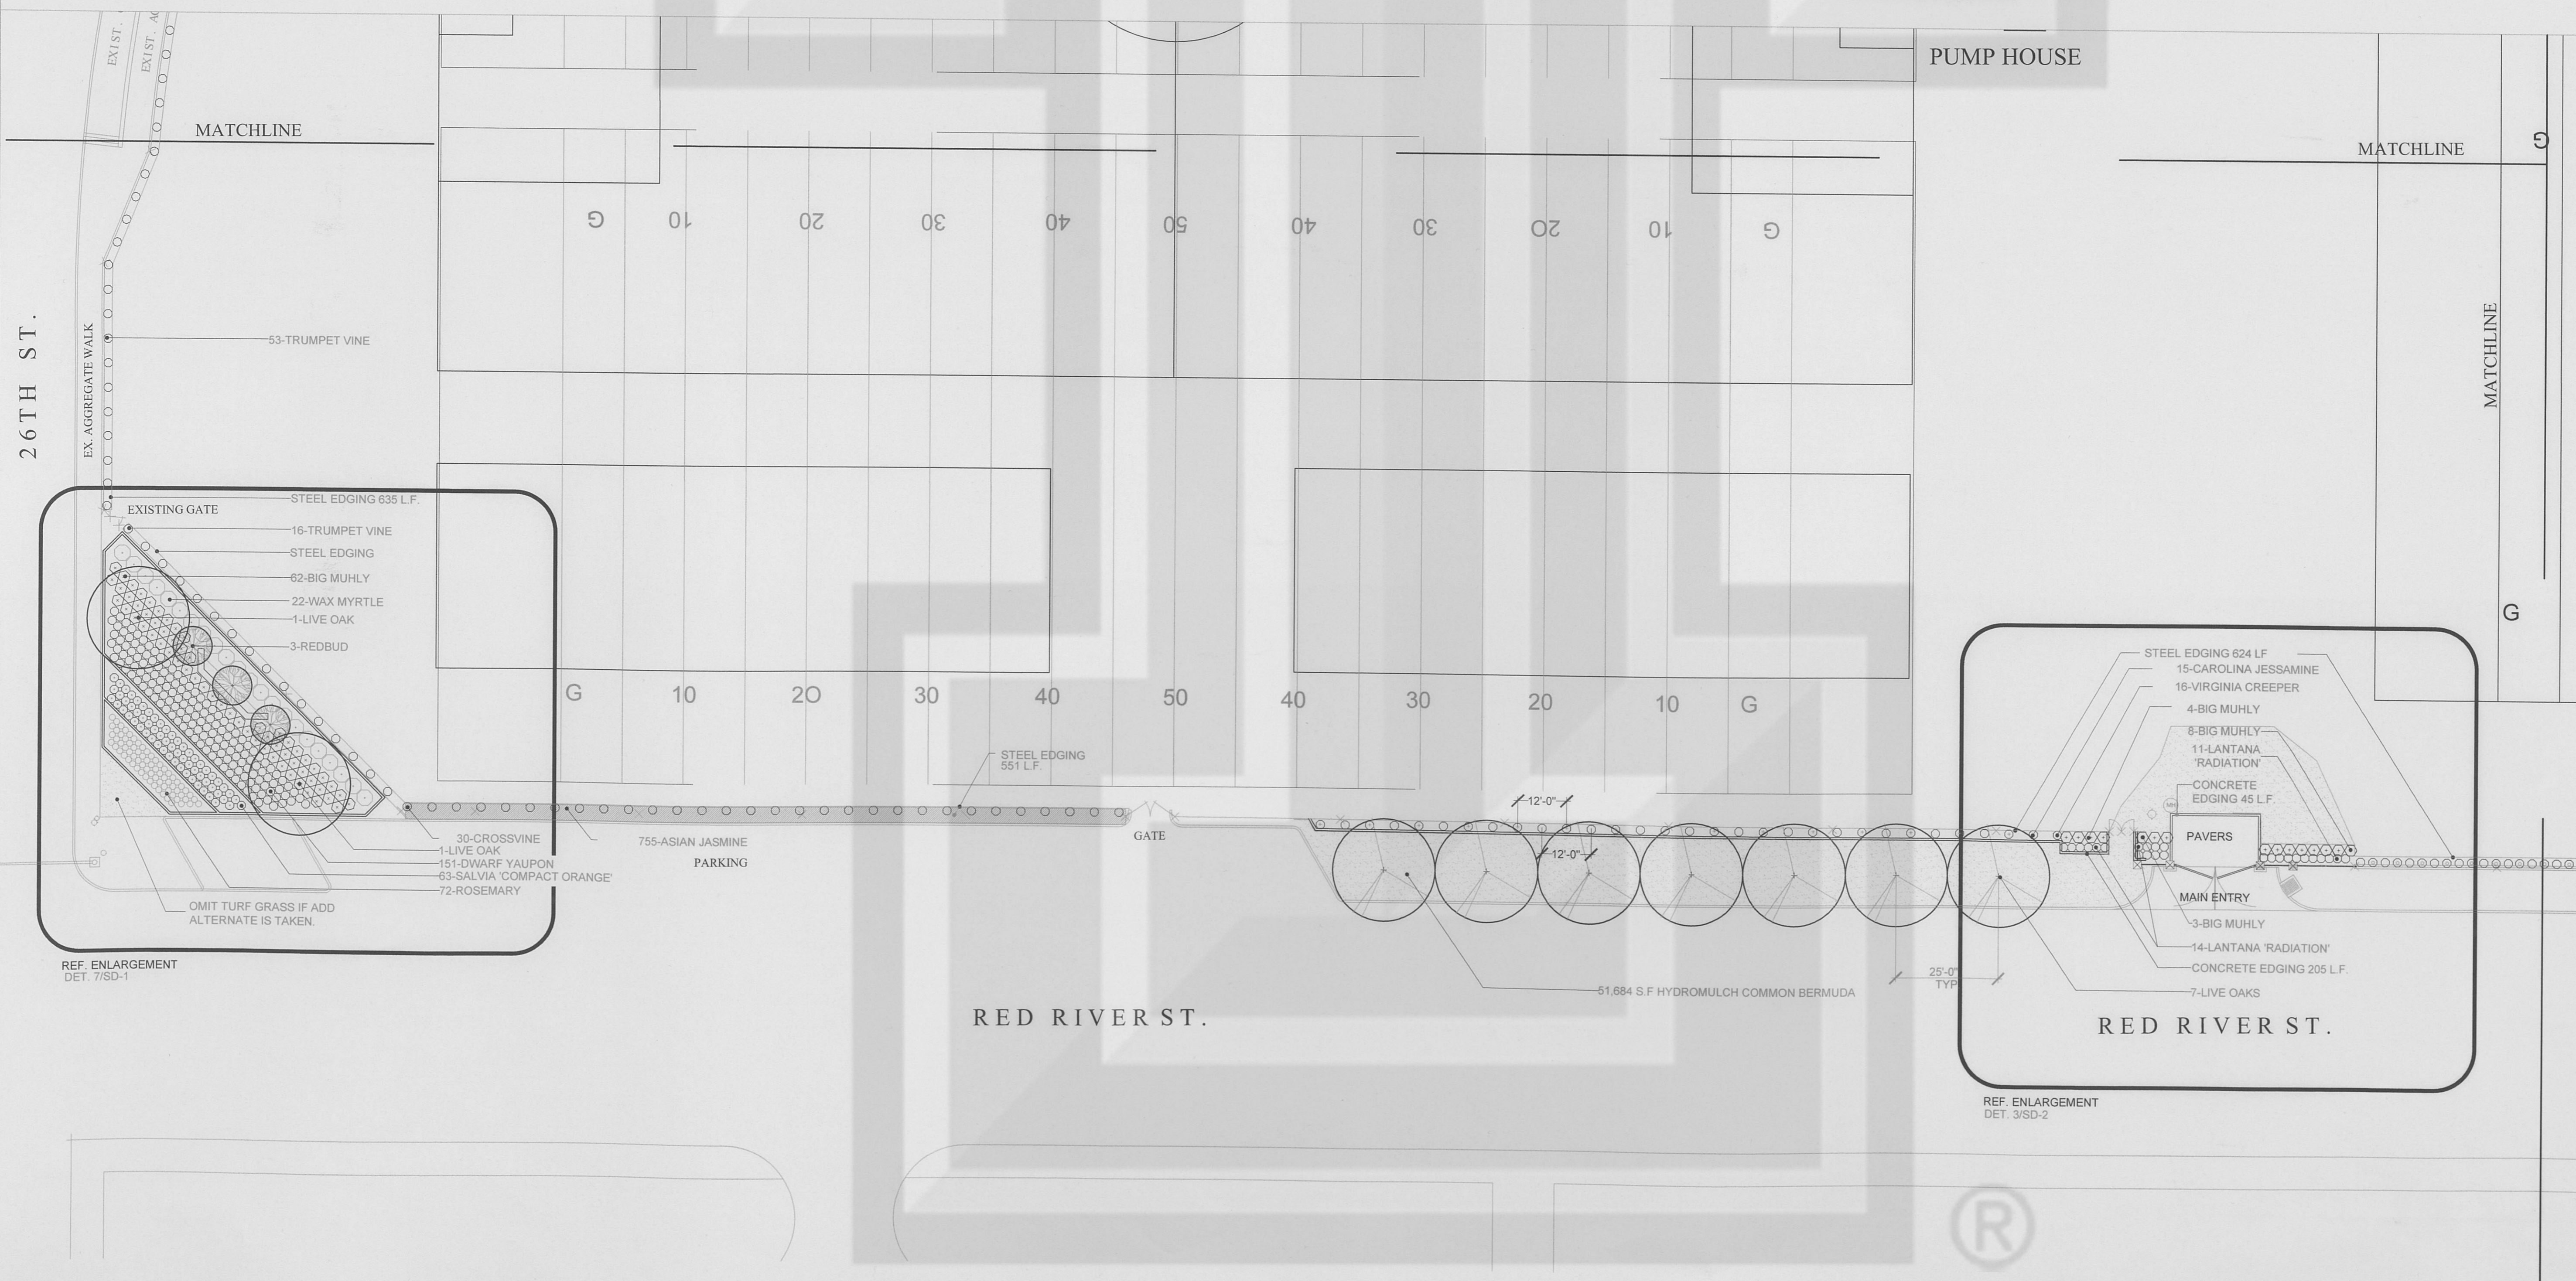


J. Robert Anderson, ASLA
Landscape Architect
 1715 S. Capital of Texas Highway
 Suite 105
 Austin, Texas 78746
 phone 512.329.8882
 fax 512.329.8883
 e-mail: jranders@aol.com

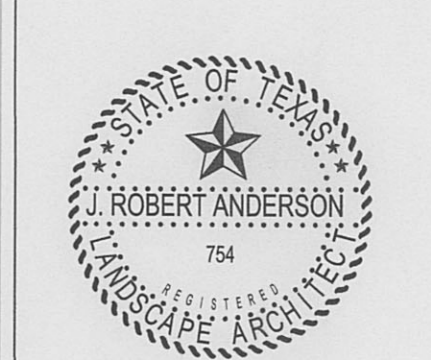


The University of Texas at Austin
 Frank Denius Field

Owner: University of Texas
 Address: Mens Athletic Department
 Red River and MLK Blvd.
 Austin, Texas
 78701
 phone: 512.471.5317
 Fax: 512.471.4833

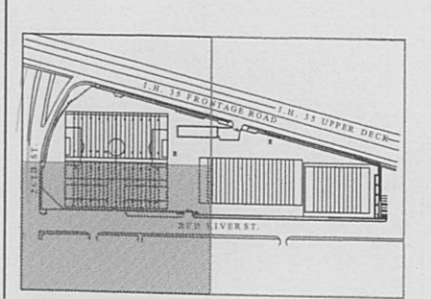

AREA MAP
 DATE ISSUED:
 REVISIONS:
 DRAWN BY: TAB/TWH
 REVIEWED BY: JRA

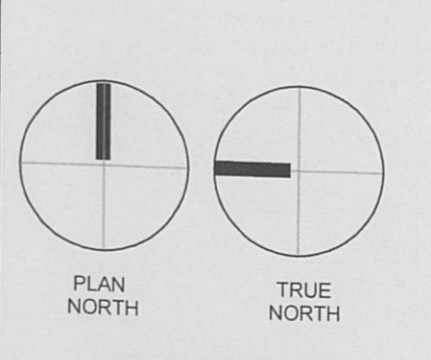

SCALE: 1" = 20'-0"
 PROJECT NUMBER:
LANDSCAPE PLANTING PLAN
LP- 2