

Client

LOADSTAR, Inc.

San Antonio, Texas 78230

Issues and Revisions

| Date | Issues |
|----------|------------------------|
| 01/27/12 | Design Development |
| 03/23/12 | CD Check Set |
| 06/08/12 | La Cantera Pricing Set |
| 07/11/12 | Permit Set |
| 10/11/12 | For Construction |

| No. | Date | Revisions |
|-----|----------|----------------------|
| 8 | 10/15/12 | For Construction Set |

©2010 LRK Inc.
Drawings, written material, and design concepts shall not be used or reproduced in whole or part in any form or format without prior written consent of LRK Inc. Do not scale drawings. Use given dimensions only. If not shown, verify correct dimensions with the Architect. Contractor shall check and verify all dimensions and conditions at job site.

Seal

J. Robert
ANDERSON
LANDSCAPE ARCHITECTS

3728 MANCHACA ROAD • AUSTIN, TEXAS 78704
P 512-440-3049 • F 512-440-8000
WWW.JRANDERSON.COM

Project Number: 01.11073.00

Project Name:

La Cantera Phase I
Market Street
San Antonio, Texas

Drawing Name:


HARDSCAPE DETAIL

Drawn By: RHD

Checked By: IRA

8

L211

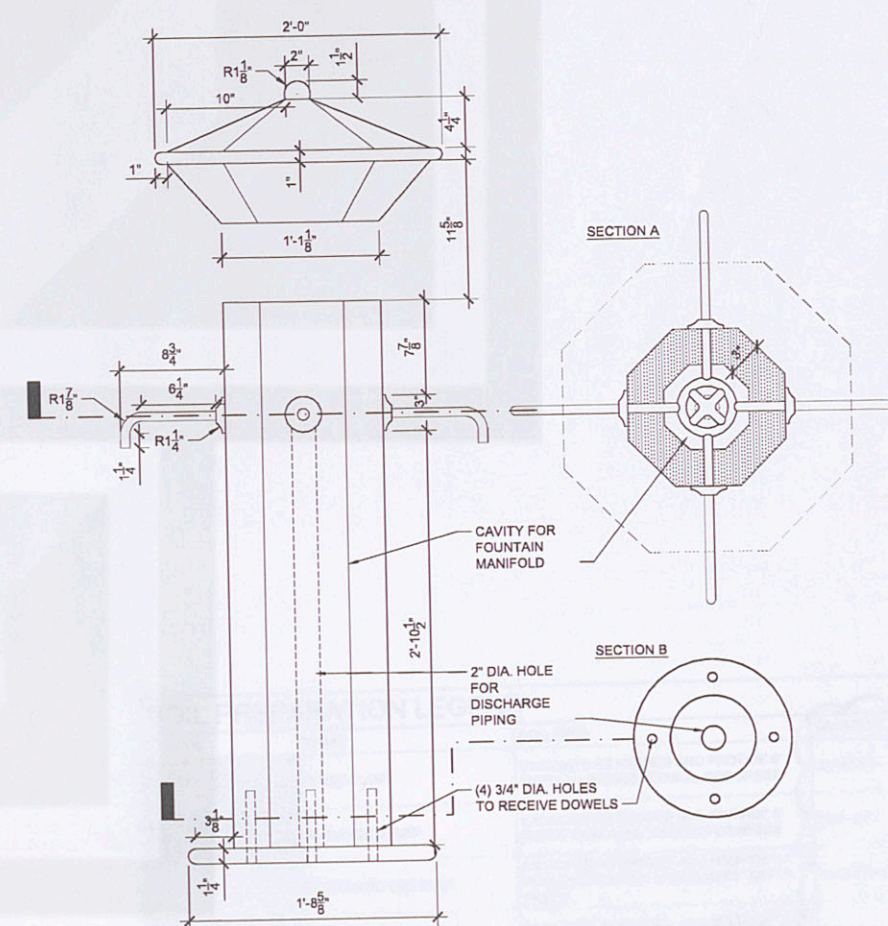

FOUNTAIN EQUIPMENT SCHEDULE

- 1 FOUNTAIN EQUIPMENT PACKAGE IN VAULT, FOUNTAIN PEOPLE VAULT-PAK #PFV-AC075-11 W/ 3/4"HP PUMP, CARTRIDGE FILTER, AND LIGHTING CIRCUIT
- 2 MECHANICAL FLOAT VALVE IN WALL NICHE, FOUNTAIN PEOPLE #R-50
- 3 WALL MOUNTED OVERFLOW FITTING, FOUNTAIN PEOPLE #R-19
- 4 FLOOR DRAIN WITH PLUG, FOUNTAIN PEOPLE #FFD-300
- 5 INTAKE, ANTI-VORTEX DIVERTER PLANTE AND SUMP, FOUNTAIN PEOPLE #R-50C (2 TOTAL)
- 6 UNDERWATER NICHTE LIGHT, HYDREL #4413
- 7 EMITTER, 1 1/2" ADJUSTABLE DIVERTER FITTING, FOUNTAIN PEOPLE FAD-150
- 8 IN-LINE CHLORINATOR IN VALVE BOX
- 9 BALL VALVE, LINE SIZE, IN VALVE BOX
- 10 UNDERWATER JUNCTION BOX
- 11 (4) 1/2" X 18" STAINLESS STEEL DOWELS MORTARED AT BOTH ENDS
- 12 CONCRETE PEDESTAL

